

Battery Operated Scissor lift pallet truck

The HEFTY Battery operated scissor lift pallet truck provides, easy Operation Adopt thickened anti-pinch scissor design, strong and durable, can prevent accidental pinch injury, conform to the human body. Engineering principle, with overload protection function, safer and more reliable.

Double section cylinder, safe and durable:

The high quality air tight cylinder avoids oil leakage, and the double-section hydraulic piston rod makes the fork lift higher


Electric lifting, efficient and fast:

Humanized design, one button power switch, electric lifting, simple and quick operation, high quality industrial charging plug interface, safe, durable and reliable.

Easy operation:

Adopt thickened anti-pinch scissor design, strong and durable, can prevent accidental pinch injury, conform to the human body engineering principle, with overload protection function, safer and more reliable

Assembly diagram

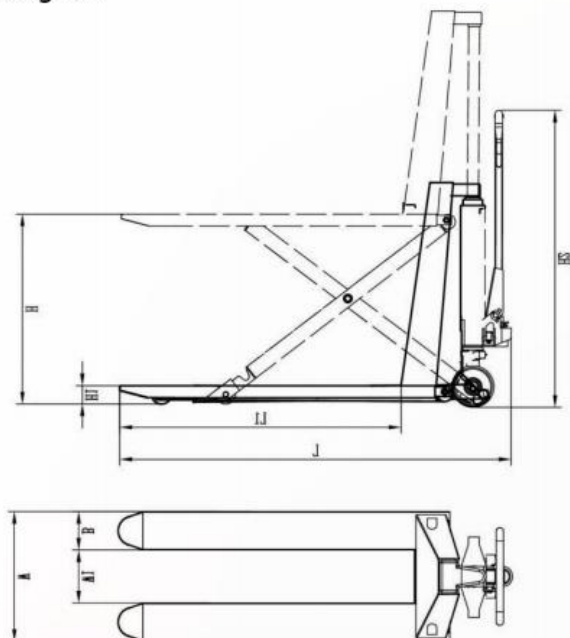

ACHLT-DALL

ALL-semi-electric high lift pallet truck

Full electric high lift truck



Technical parameter

Technical parameters

Rated load	Kg	1500
Fork minimum height	H1 (mm)	85
Fork maximum height after lifting	H (mm)	800
Maximum lifting stroke	mm	≥715
Fork outside width	W (mm)	540/680
Fork inner width	W1 (mm)	220/360
Fork size	L1 (mm)	1150
Single fork width	B (mm)	160
Fork thickness	s (mm)	50
Vehicle length	L (mm)	1700
Vehicle height	H2 (mm)	1680
Bearing Wheel size	mm	Medium 80*20
steering wheel size	mm	Medium 180*50
Minimum turning diameter	mm	1260
Power unit	V/Kw	24V/0.7
Wheel material		PU/nylon
Lithium battery capacity	V/AH	24V20A
Vehicle Weight	Kg	165/170
Total weight (2 sets/support)	Kg	335/340

